



TABLE CONNECTIONS FOR VARIOUS POWER SUPPLIES			
ARRST.	POWER SUPPLY FOR MOTOR	D.C. FOR LOCAL CIRCUITS TO LINE RELAY AND SELECTOR MAGNETS	POWER CONNECTIONS
1	110 V. A.C. 50-60 CYCLES	RECT. CONTROL BY PTR. MTR. SWITCH	AS SHOWN
2	110 V. A.C. 50-60 CYCLES	RECTIFIER "ON" CONTINUOUSLY FOR UPPER CASE "H" OR "M" MOTOR CONTROL	REMOVE WIRE FROM TERM. 3 ON RECEPTACLE "B" AND CONNECT TO TERM. 1.
3	110 V. A.C. 50-60 CYCLES	110 V. D.C. POWER SUPPLY EXTERNAL TO TABLE (EITHER + OR - GROUNDED)	CONNECT A.C. TO RECEPTACLE "B" AS SHOWN. REMOVE WIRES FROM + AND - TERMINALS ON RECEPTACLE "D" AND TAPE ENDS. CONNECT + AND - 110 V. D.C. TO CORRESPONDING TERMS. OF RECEPTACLE "C".
4	110 V. A.C. 25 CYCLES	RECTIFIER CONTROL BY PTR. MTR. SWITCH	SAME AS ARRST. 1 ABOVE EXCEPT ADD 99971 RESISTOR AS SPECIFIED IN NOTE "A" BELOW
5	110 V. A.C. 25 CYCLES	RECTIFIER "ON" CONTINUOUSLY FOR UPPER CASE "H" OR "M" MOTOR CONTROL	SAME AS ARRST. 2 ABOVE EXCEPT ADD 99971 RESISTOR AS SPECIFIED IN NOTE "A" BELOW
6	110 V. A.C. 25 CYCLES	110 V. D.C. POWER SUPPLY EXTERNAL TO TABLE (EITHER + OR - GROUNDED)	SAME AS ARRST. 3 ABOVE EXCEPT ADD 99971 RESISTOR AS SPECIFIED IN NOTE "A" BELOW
7	110 V.D.C. POWER SUPPLY EXTERNAL TO TABLE (+ GROUNDED)		95080 CORD NOT USED. STRAP PTR. TERMS. 22 & 25. STRAP PTR. TERMS. 23 & 24.
8	110 V.D.C. POWER SUPPLY EXTERNAL TO TABLE (- GROUNDED)		95080 CORD NOT USED. STRAP PTR. TERMS. 25 & 24. STRAP PTR. TERMS. 25 & 25.

NOTES:

- A. REMOVE AND DISCARD THE STRAP CONNECTED BETWEEN THE UPPER TERMINAL OF RECEPTACLE "A" AND TERMINAL "2" OF RECEPTACLE "B". REMOVE GROUND LEAD FROM THE LATTER TERMINAL. CONNECT A LEAD FROM 99971 RESISTOR TO TERMINAL "2" OF RECEPTACLE "B", AND CONNECT OTHER RESISTOR LEAD AND GROUND LEAD TO UPPER TERMINAL OF RECEPTACLE "A".

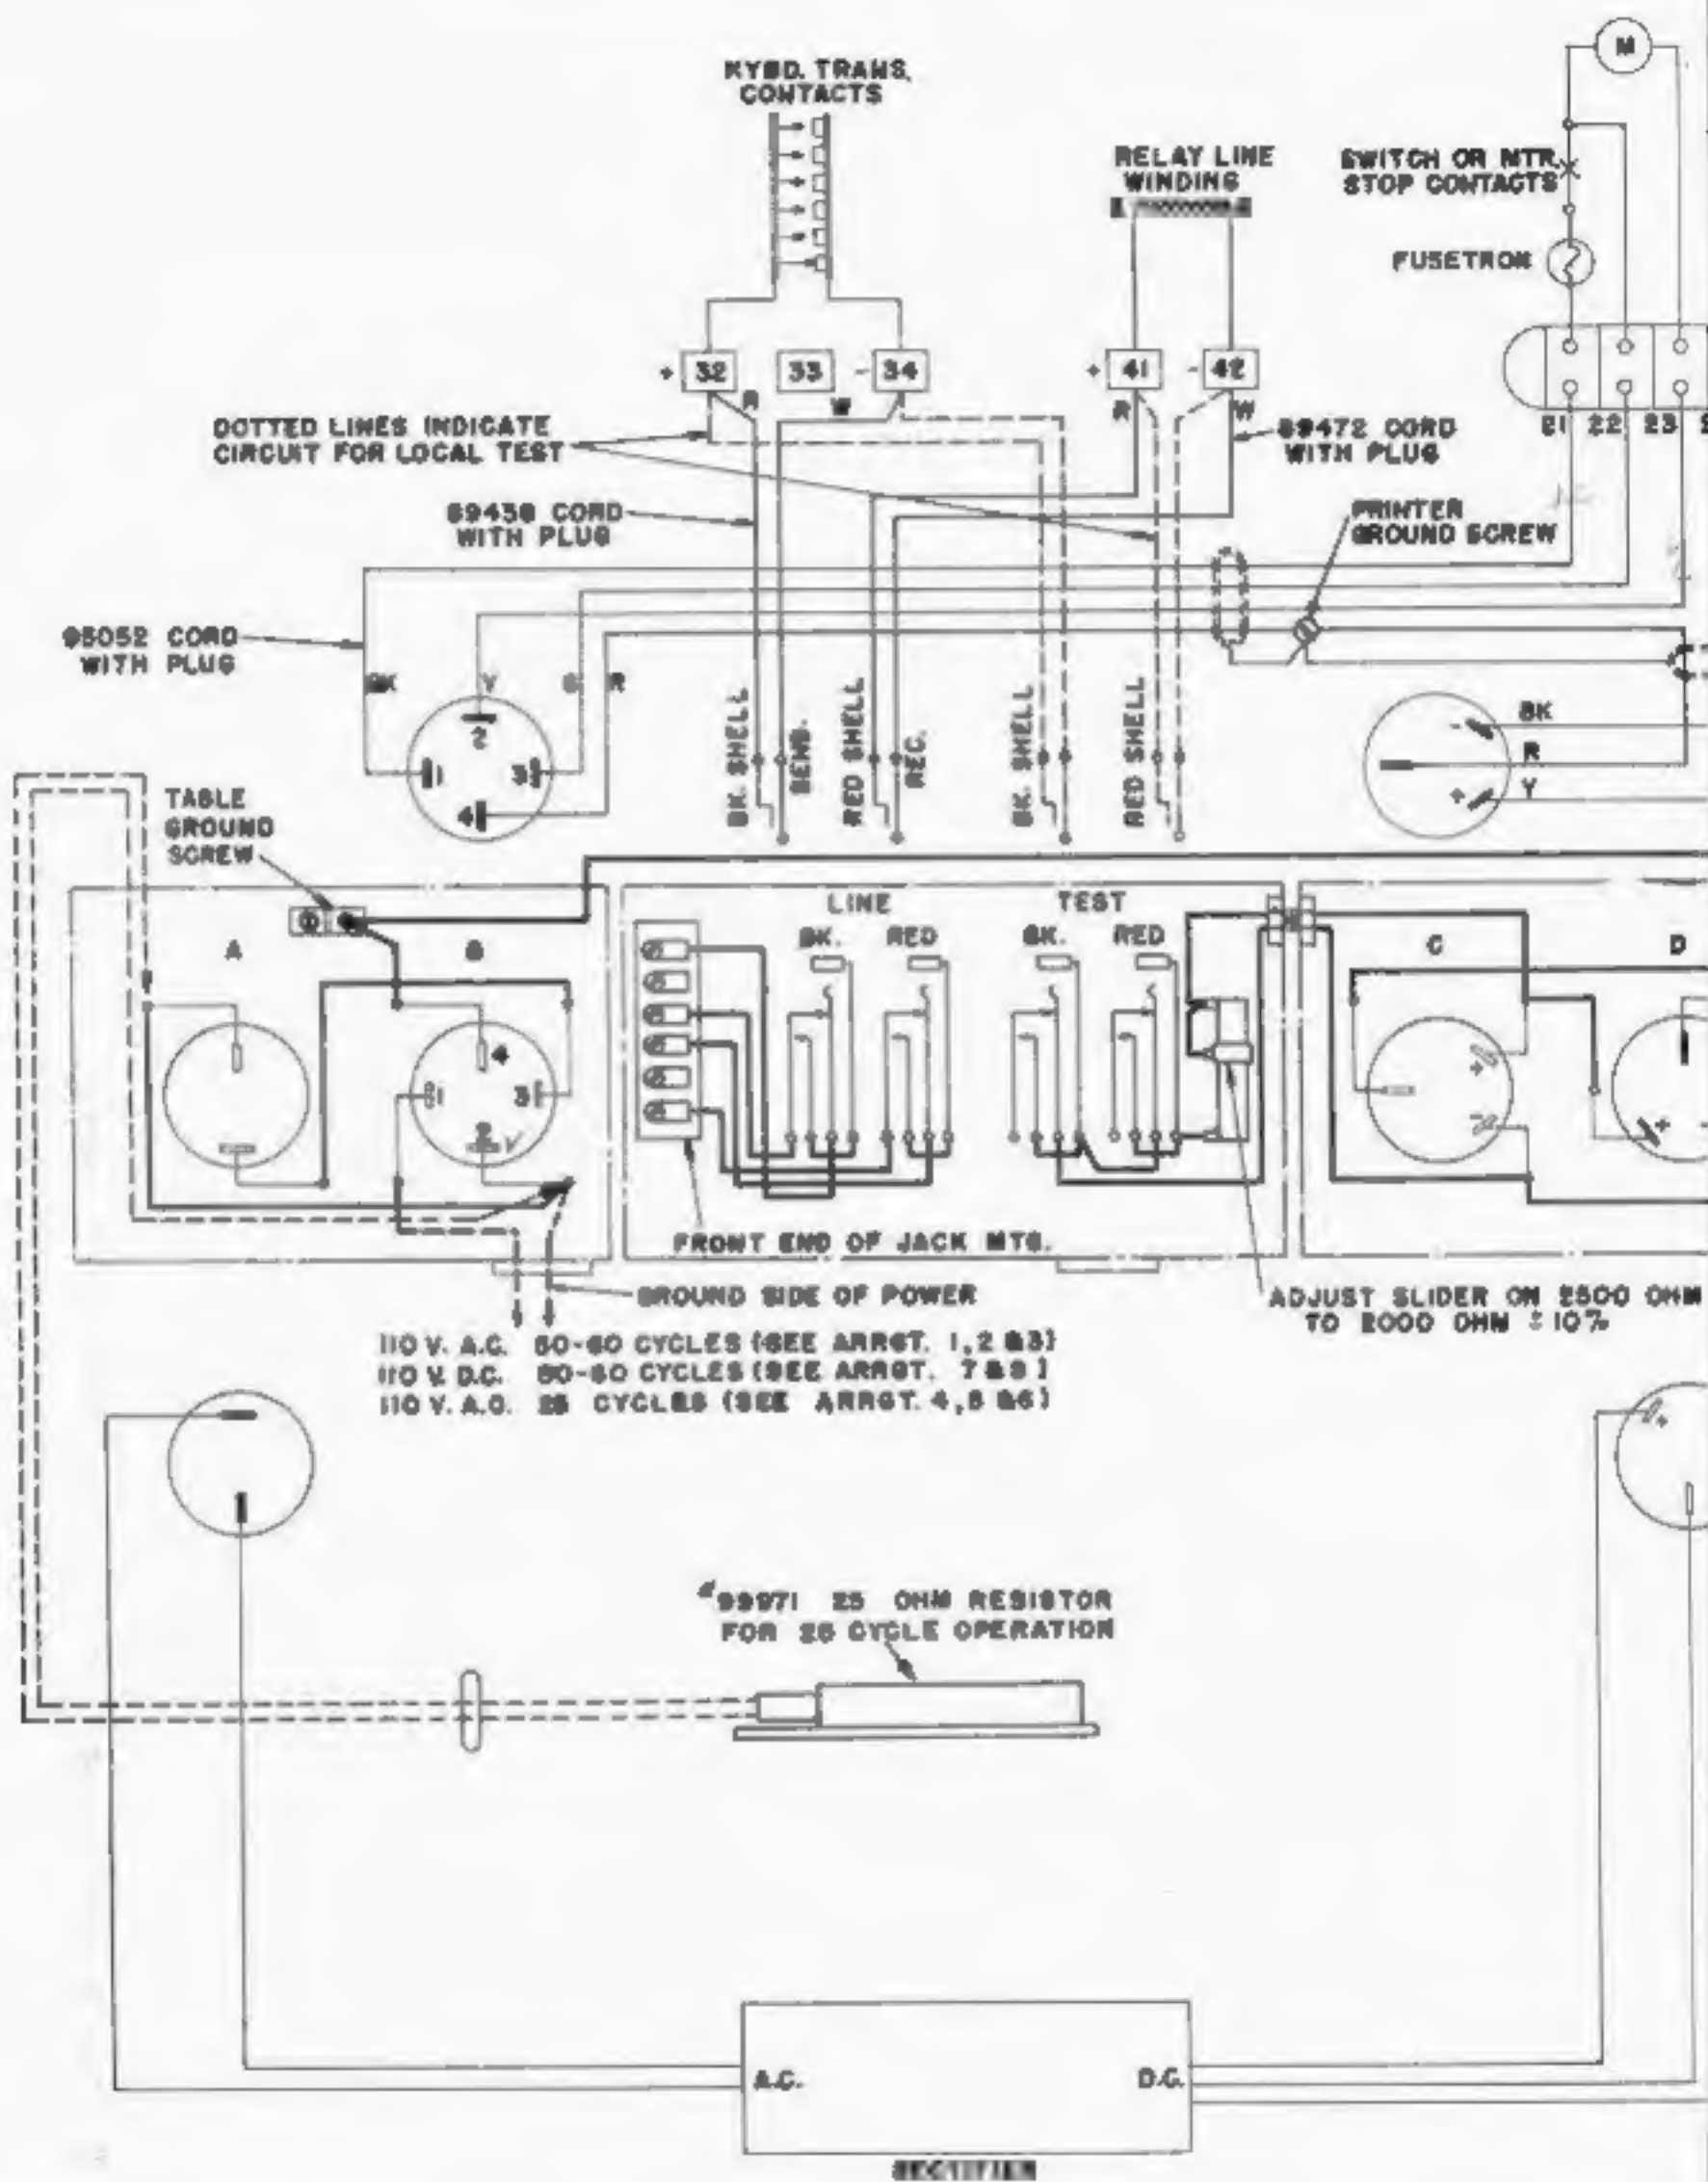



--- POWER LEADS
 --- TABLE WIRING - RM 34581 - 10 DELTASTON
 C.G. WIRE - BLACK
 <---> DENOTES SHIELDED CABLE
 RECEPTACLES AND PLUGS SHOWN FROM
 SLOT AND PRONG FACES.
 _____ DENOTES WIRES IN BX

REVISIONS
 (A) NUMBERING RE-
 MOVED FROM JACK
 MFG. 7-21-61 J.J.F.
 (B) NOTES REGARDING
 25 CYCLE OPERATION
 ADDED
 8-22-61 G.M.M.

TELETYPE
CORPORATION

WD-2031

FEB 14 1964

WD 2031-B

WIRING DIAGRAM TABLE

FOR
15 PRINTER
XRT-106

DRAWN HCA
TRACED
CHECKED DPN
ENGR D. DPN
APPROVED JWD